

H-4354

High-Reliability, High-Density Enterprise Computing Systems



UNICOM Engineering's H-4354 platform is built on 3rd Gen Intel® Xeon® Scalable processors with support for the latest Intel Optane persistent memory, network adapters, and storage. Offering the same capabilities, I/O, and accelerators as our E-2900 R6 enterprise computing system in an ultra-dense 4U form factor that supports an impressive 54 hot swap drives. Ideally suited for cost-effective, continuous storage requirements and solutions that feature workloads like data archiving and logging. The H-4354 is highly configurable to tailor performance to meet the needs of storage centric applications and a variety of cloud, AI, and HPC workloads.

Features and Benefits

Built for Performance

- Supports up to two Intel Ice Lake-SP Microarchitecture processor for maximum performance and density
- Supports up to 32 DDR4-3200 MT/s ECC DIMMs across 16 channels for faster application execution and greater overall stability
- Supports up to 16 Intel Optane DC Persistent Memory Modules of up to 512GB each for even greater application performance
- Supports any combination between forty-six SAS/SATA drives plus eight NVMe drives and fifty-four SAS/SATA drives to allow ideal customization to meet the storage needs of various applications
- PCIe Gen4 provides support for the latest generation of network, accelerator, and RAID controllers

Built for High-Reliability Applications


- Enterprise class drives and RAID ensure maximum reliability
- Hot swap hard drives and power supplies ensure low Mean-Time-To-Repair (MTTR)
- Redundant hot swap power supplies ensure high reliability in case of a failure

Gain a Competitive Advantage

Many times the best way to deliver a truly competitive solution is to leverage the products, skills, and resources of proven partners. Building on innovative Intel technology, UNICOM Engineering's design, integration, logistics and support expertise helps customers streamline software application deployment and shorten time to revenue. Our strong foundation of engineering expertise, process-driven manufacturing, technology partner relationships, and an unrelenting commitment to quality has made UNICOM Engineering one of the most trusted deployment partners in the industry.

H-4354

technical specifications

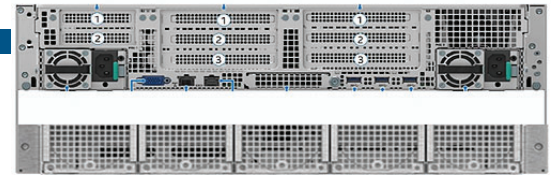

H-4354 Rear View

Form Factor

- 4U rack mount

Rack Dimensions (HxWxD)

- 6.88" (175mm) x 17.24" (438mm) x 33.46" (850mm)

Processor Support

- Support for one or two Intel Xeon Ice Lake-SP CPUs
- Dual SocketP-4 LGA4189
- Maximum supported Thermal Design Power (TDP) of up to 270W

Chipset

- Intel C621A chipset

Memory

- 32 DIMMs slots, 16 DIMM slots per processor
- 8 memory channels per processor, 2 DIMMs per channel per processor
- DDR4-3200 MT/s ECC Registered
- Intel Optane Persistence Memory Series 200

Storage Bay Options

- 54 SAS/SATA drive bays (supports up to 8 NVMe drives)
- 2 x M.2 NVMe/SATA connectors
- Optional internal fix mount 2.5" SATA SSD drive support

Storage Options

- 3.5" SAS/SATA HDD, 12 Gb/s/6 Gb/s
- 2.5" SATA SSD, 6 Gb/s
- 2.5" NVMe SSD, U2
- M.2 SATA/NVMe SSD

Integrated RAID Support

- On-Board SATA Software RAID levels 0/1/5/10
- Optional Intel Virtual RAID on CPU (VROC) for NVMe with activation key

OCP Module Slot

- 1 Intel OCP 3.0 Expansion Module slot to support an optional module
- 10 GbE SFP+, 25 GbE SFP28, 50 GbE SFP28, 100 GbE QSFP28 NICs,

Riser Cards

- Support for 3 riser card slots, Max 8 PCIe addin cards

Riser Slot #1 optional cards:

- 1 x PCIe Gen4 x16 @ x16 lanes FH/FL, 1 x PCIe Gen4 x16 @ x8 lanes FH/FL, 1 x PCIe Gen4 x8 @ x8 lanes
- 1 x PCIe Gen4 x16 @ x16 lanes FH/FL double-width, 1 x PCIe Gen4 x16 @ x16 lanes FH/HL

Riser Slot #2:

- 1 x PCIe Gen4 x16 @ x16 lanes FH/FL, 1 x PCIe Gen4 x16 @ x8 lanes FH/FL, 1 x PCIe Gen4 x8 @ x8 lanes
- 1 x PCIe Gen4 x16 @ x16 lanes FH/FL double-width, 1 x PCIe Gen4 x16 @ x16 lanes FH/HL

Riser Slot #3: 2 x PCIe Gen4 x16 @ x8 lanes LP/H

PCIe Cards and Add-in Options

- 1 GbE, 10 GbE, 25 GbE 50 GbE, 100 GbE NICs, copper, fiber
- SATA/NVMe SSD
- Entry / Enterprise RAID Controllers
- 16 Gb fibre channel

External I/O

- 1 Video ports (DB-15) – 1 rear
- 4 USB 3.0 ports – 3 rear, 1 front
- 1 USB 2.0 port – front
- 1 RJ-45 serial port – rear
- 1 Dedicated RJ-45 server management port – rear

Server Management

- Integrated Baseboard Management Controller (BMC), IPMI 2.0 Compliant
- Intel Remote Management Module 4 Management NIC for dedicated network interface
- Optional Intel Remote Management Module 4 Lite for remote Keyboard, Video, Mouse (KVM) support

Security

- Optional Intel Trusted Platform Module (TPM)

Front Control Panel

- System ID button with integrated LED
- Non-Maskable Interrupt (NMI) button
- Drive activity LEDs
- System cold reset button
- System status LED
- Power / sleep button with integrated LED

System Fans

- 8x hot swap system fans
- 1x power supply fan for each power supply module

Power Supply Options

- Up to 2 hot swap, redundant capable power supply
- 2000W AC

OS Support

Targets:

- Microsoft Windows Server 2019 / 2016
- Red Hat Enterprise Linux 8.2 / 7.8
- SuSE Enterprise Linux 15 sp2
- Ubuntu Linux 20.04-LTS
- VMWare ESXi 7.0 / 6.7 Update 3
- CentOS 8.2

Regulatory Approval

Expected Certifications:

- National Recognized Testing Laboratory (NRTL), Conforming European (CE) Mark / Safety, Certification Body (CB)
- Federal Communications Commission (FCC) Parts 15 Class A, Voluntary Control Council for Interference (VCCI), Australia & New Zealand Regulatory Compliance Mark (RCM)
- Restriction of the use of certain Hazardous Substances (RoHS) Compliant

Environment

- Operating temperature: 10°C to 35°C (50 to 95°F)
- Non-operating temperature: -40°C to 70°C (-40 to 158°F)
- Operating humidity: 8%-90%, non-condensing
- Non-operating humidity: 5%-95%, non-condensing

Warranty

- Standard two-year warranty, return-to-factory
- Optional extended warranty and advance replacement service

NOTE: These specifications should be viewed as preliminary and final specifications may vary.

Support and Maintenance Services

UNICOM Engineering offers a variety of support and maintenance service programs to ensure high availability, rapid response, effective troubleshooting, fast parts replacement and 24-hour support.

Please visit www.unicomengineering.com/supportservices for more information.

sales@unicomengineering.com

unicomengineering.com

twitter.com/UNICOMEng

facebook.com/UNICOMEng

+1 800.977.1010

linkedin.com/company/unicomengineering